

CdSb (B_e) Structure:

AB_oP16_61_c_c-001


This structure previously used the label(s) **AB_oP16_61_c_c**. Calls to these addresses will be redirected here.

Cite this page as:

- H. Eckert, S. Divilov, M. J. Mehl, D. Hicks, A. C. Zettl, M. Esters, X. Campilongo, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 4*, Comput. Mater. Sci. **240**, 112988 (2024), doi: 10.1016/j.commatsci.2024.112988.
- D. Hicks, M. J. Mehl, M. Esters, C. Oses, O. Levy, G. L. W. Hart, C. Toher, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 3*, Comput. Mater. Sci. **199**, 110450 (2021), doi: 10.1016/j.commatsci.2021.110450.

<https://afLOW.org/prototype-encyclopedia/RL87>

https://afLOW.org/prototype-encyclopedia/AB_oP16_61_c_c-001

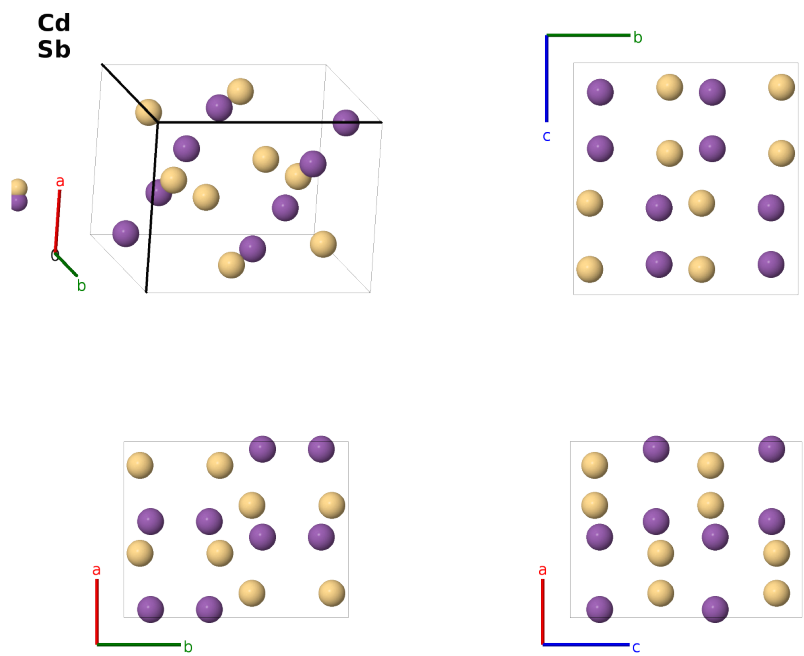

Prototype	CdSb
AFLOW prototype label	AB_oP16_61_c_c-001
<i>Strukturbericht</i> designation	B_e
ICSD	52831
CCDC	1617548
Pearson symbol	oP16
Space group number	61
Space group symbol	$Pbca$
AFLOW prototype command	<code>aflow --proto=AB_oP16_61_c_c-001 --params=a, b/a, c/a, x₁, y₁, z₁, x₂, y₂, z₂</code>


Other compounds with this structure

AsCd, AsZn, SbZn

- This structure has the same AFLOW label as solid cyanogen, (CN)₂. The structures are generated by the same symmetry operations with different sets of parameters (`--params`) specified in their corresponding CIF files.

Simple Orthorhombic primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= a \hat{\mathbf{x}} \\ \mathbf{a}_2 &= b \hat{\mathbf{y}} \\ \mathbf{a}_3 &= c \hat{\mathbf{z}}\end{aligned}$$



Basis vectors

	Lattice coordinates		Cartesian coordinates	Wyckoff position	Atom type
$\mathbf{B}_1$	$= x_1 \mathbf{a}_1 + y_1 \mathbf{a}_2 + z_1 \mathbf{a}_3$	$=$	$ax_1 \hat{\mathbf{x}} + by_1 \hat{\mathbf{y}} + cz_1 \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_2$	$= -\left(x_1 - \frac{1}{2}\right) \mathbf{a}_1 - y_1 \mathbf{a}_2 + \left(z_1 + \frac{1}{2}\right) \mathbf{a}_3$	$=$	$-a\left(x_1 - \frac{1}{2}\right) \hat{\mathbf{x}} - by_1 \hat{\mathbf{y}} + c\left(z_1 + \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_3$	$= -x_1 \mathbf{a}_1 + \left(y_1 + \frac{1}{2}\right) \mathbf{a}_2 - \left(z_1 - \frac{1}{2}\right) \mathbf{a}_3$	$=$	$-ax_1 \hat{\mathbf{x}} + b\left(y_1 + \frac{1}{2}\right) \hat{\mathbf{y}} - c\left(z_1 - \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_4$	$= \left(x_1 + \frac{1}{2}\right) \mathbf{a}_1 - \left(y_1 - \frac{1}{2}\right) \mathbf{a}_2 - z_1 \mathbf{a}_3$	$=$	$a\left(x_1 + \frac{1}{2}\right) \hat{\mathbf{x}} - b\left(y_1 - \frac{1}{2}\right) \hat{\mathbf{y}} - cz_1 \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_5$	$= -x_1 \mathbf{a}_1 - y_1 \mathbf{a}_2 - z_1 \mathbf{a}_3$	$=$	$-ax_1 \hat{\mathbf{x}} - by_1 \hat{\mathbf{y}} - cz_1 \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_6$	$= \left(x_1 + \frac{1}{2}\right) \mathbf{a}_1 + y_1 \mathbf{a}_2 - \left(z_1 - \frac{1}{2}\right) \mathbf{a}_3$	$=$	$a\left(x_1 + \frac{1}{2}\right) \hat{\mathbf{x}} + by_1 \hat{\mathbf{y}} - c\left(z_1 - \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_7$	$= x_1 \mathbf{a}_1 - \left(y_1 - \frac{1}{2}\right) \mathbf{a}_2 + \left(z_1 + \frac{1}{2}\right) \mathbf{a}_3$	$=$	$ax_1 \hat{\mathbf{x}} - b\left(y_1 - \frac{1}{2}\right) \hat{\mathbf{y}} + c\left(z_1 + \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_8$	$= -\left(x_1 - \frac{1}{2}\right) \mathbf{a}_1 + \left(y_1 + \frac{1}{2}\right) \mathbf{a}_2 + z_1 \mathbf{a}_3$	$=$	$-a\left(x_1 - \frac{1}{2}\right) \hat{\mathbf{x}} + b\left(y_1 + \frac{1}{2}\right) \hat{\mathbf{y}} + cz_1 \hat{\mathbf{z}}$	(8c)	Cd I
$\mathbf{B}_9$	$= x_2 \mathbf{a}_1 + y_2 \mathbf{a}_2 + z_2 \mathbf{a}_3$	$=$	$ax_2 \hat{\mathbf{x}} + by_2 \hat{\mathbf{y}} + cz_2 \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{10}$	$= -\left(x_2 - \frac{1}{2}\right) \mathbf{a}_1 - y_2 \mathbf{a}_2 + \left(z_2 + \frac{1}{2}\right) \mathbf{a}_3$	$=$	$-a\left(x_2 - \frac{1}{2}\right) \hat{\mathbf{x}} - by_2 \hat{\mathbf{y}} + c\left(z_2 + \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{11}$	$= -x_2 \mathbf{a}_1 + \left(y_2 + \frac{1}{2}\right) \mathbf{a}_2 - \left(z_2 - \frac{1}{2}\right) \mathbf{a}_3$	$=$	$-ax_2 \hat{\mathbf{x}} + b\left(y_2 + \frac{1}{2}\right) \hat{\mathbf{y}} - c\left(z_2 - \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{12}$	$= \left(x_2 + \frac{1}{2}\right) \mathbf{a}_1 - \left(y_2 - \frac{1}{2}\right) \mathbf{a}_2 - z_2 \mathbf{a}_3$	$=$	$a\left(x_2 + \frac{1}{2}\right) \hat{\mathbf{x}} - b\left(y_2 - \frac{1}{2}\right) \hat{\mathbf{y}} - cz_2 \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{13}$	$= -x_2 \mathbf{a}_1 - y_2 \mathbf{a}_2 - z_2 \mathbf{a}_3$	$=$	$-ax_2 \hat{\mathbf{x}} - by_2 \hat{\mathbf{y}} - cz_2 \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{14}$	$= \left(x_2 + \frac{1}{2}\right) \mathbf{a}_1 + y_2 \mathbf{a}_2 - \left(z_2 - \frac{1}{2}\right) \mathbf{a}_3$	$=$	$a\left(x_2 + \frac{1}{2}\right) \hat{\mathbf{x}} + by_2 \hat{\mathbf{y}} - c\left(z_2 - \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{15}$	$= x_2 \mathbf{a}_1 - \left(y_2 - \frac{1}{2}\right) \mathbf{a}_2 + \left(z_2 + \frac{1}{2}\right) \mathbf{a}_3$	$=$	$ax_2 \hat{\mathbf{x}} - b\left(y_2 - \frac{1}{2}\right) \hat{\mathbf{y}} + c\left(z_2 + \frac{1}{2}\right) \hat{\mathbf{z}}$	(8c)	Sb I
$\mathbf{B}_{16}$	$= -\left(x_2 - \frac{1}{2}\right) \mathbf{a}_1 + \left(y_2 + \frac{1}{2}\right) \mathbf{a}_2 + z_2 \mathbf{a}_3$	$=$	$-a\left(x_2 - \frac{1}{2}\right) \hat{\mathbf{x}} + b\left(y_2 + \frac{1}{2}\right) \hat{\mathbf{y}} + cz_2 \hat{\mathbf{z}}$	(8c)	Sb I

References

- [1] K. E. Almin, *The Crystal Structure of CdSb and ZnSb*, Acta Chem. Scand. **4**, 400–407 (1948), doi:10.3891/acta.chem.scand.02-0400.

First cited in

M. J. Mehl, D. Hicks, C. Toher, O. Levy, R. M. Hanson, G. L. W. Hart, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 1*, Comput. Mater. Sci. **136**, S1-828 (2017). doi: 10.1016/j.commatsci.2017.01.017